

Blast Report

C.O. Number: _____	Blast Time: <u>1:15 P.M.</u>	Blast Date: <u>5-30-17</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>18300 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.021</u>	
Location of Blast: <u>Section 6</u>	Blast GPS Points: <u>N 25° 56' 34.2" W 80° 23' 0.6"</u>	
Weather: <u>PARTLY CLOUDY</u>	Temp: <u>88°F</u>	Wind from and Speed: <u>SSE 8MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>COMPLIANCE MACHINE</u>	Distance: <u>5,127.2'</u>	Direction: <u>0°</u>
GPS Points: <u>N 25° 57' 25.85" W 80° 23' 00.00"</u>		

No. of Holes			Explosives	
Hole Diameter			Type	Pounds or Units
<u>39</u>				
<u>6"</u>				
<u>84'</u>	Bulk			
<u>78</u>	Bulk		<u>RIOMEX A</u>	<u>30,420</u>
<u>NA</u>	Boosters		<u>ORANGE CAP (28MA17)</u>	<u>78</u>
<u>21'</u>	Boosters			
<u>20'</u>				
<u>21'</u>				
			Total Pounds	<u>30,498</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>25m</u>	<u>39</u>	<u>AP16</u>
<u>Electronic</u>	<u>30m</u>	<u>39</u>	<u>AP16</u>

Delay or Type	Length	No. Used	Date Code
<u>BUS WIRE</u>	<u>667'</u>		

Cubic Yards in Shot: 50,960.013 Avg Pounds/Hole: 782 Holes/Delay: 1/2
 Max LBS/Delay: 391 Powder Factor: Pounds Per Cubic Yard: 0.598
 Scaled Distance Factor: 186.924 Type of Blasting Machine: Twist Battery
 Blaster Name: John Rohrer Blaster Signature: [Signature]
 Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: EP15-000005
 Site Inspection Performed: (Yes) No Mine Management Signature: [Signature]

User's Information


Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029

Comments: 26 ms delay between decks

DECK IS 9' ; SEE ATTACHMENT FOR TIMING + FOR DIRECTION

Shot Design

Holes Per Row: 13 Number Of Rows: 3 Arrows for North and POI [Circle]
 Delay Time Holes in a Row: 26ms Delay Time Between Rows: 34ms

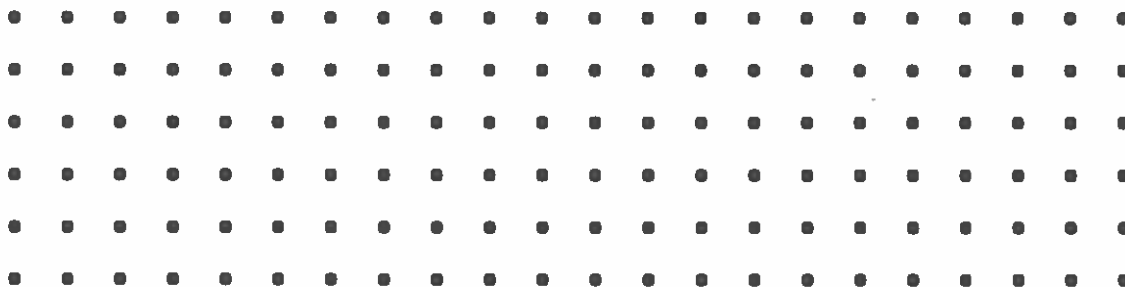

Typical Hole

Staggered or Squared (Circle One)
 Blast # Section 6 2017-7

792	758	724	
818 0	784 0	750 0	
740	706	672	
766 0	732 0	698 0	
688	654	620	
714 0	680 0	646 0	
636	602	568	
662 0	628 0	594 0	
584	550	516	
610 0	576 0	542 0	
532	498	464	
558 0	524 0	490 0	
480	446	412	
506 0	472 0	438 0	
428	394	360	
454 0	420 0	386 0	
376	342	308	
402 0	368 0	308 334 0	
324	290	256	
350 0	316 0	282 0	
272	238	204	
298 0	264 0	230 0	
220	186	152	
246 0	212 0	178 0	
168	134	100	
194 0	160 0	126 0	
		POS	