

**Blast Report**

C.O. Number: _____	Blast Time: <u>11:45 A.M</u>	Blast Date: <u>6-1-17</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>10300 NW 123<sup>rd</sup> Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.022</u>	
Location of Blast: <u>Section 6</u>	Blast GPS Points: <u>N25°56'35.8" W 80°22'38.9"</u>	
Weather: <u>PARTLY CLOUDY</u>	Temp: <u>86°F</u>	Wind from and Speed: <u>SE 9MPH</u>

**Nearest Non-Owned Structure and Seismograph Location or Other Location**

Name: <u>COMPLIANCE MACHINE</u>	Distance: <u>5,048.8'</u>	Direction: <u>0°</u>
GPS Points: <u>N25°57'25.85" W 80°22'38.9"</u>		

No. of Holes	Explosives		
Hole Diameter	Type		Pounds or Units
<u>14</u>			
<u>6</u>			
Hole Depth			
<u>84'</u>	Bulk		
No. of Powder Deck			
<u>28</u>	Bulk	<u>RIOMIX A</u>	<u>10,920</u>
Sub Drilling		<u>ORANGE CAP (28MA17)</u>	<u>28</u>
Avg. Stem Height			
<u>21'</u>	Boosters		
Burden			
<u>NA</u>			
Spacing			
<u>21'</u>		Total Pounds	<u>10,948</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: \_\_\_\_\_  
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>30m</u>	<u>14</u>	<u>AP-16</u>
<u>Electronic</u>	<u>25m</u>	<u>14</u>	<u>AP-16</u>

Delay or Type	Length	No. Used	Date Code
<u>AUS WIRE</u>	<u>494'</u>		

Cubic Yards in Shot: Reshoot Avg Pounds/Hole: 782 Holes/Delay: 1/2  
 Max LBS/Delay: 391 Powder Factor:Pounds Per Cubic Yard: 0.598  
 Scaled Distance Factor: 181.260 Type of Blasting Machine: Twist Battery

Blaster Name: John Rohrer Blaster Signature: JR Roh  
 Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: EP15-00005  
 Site Inspection Performed: Yes No Mine Management Signature: \_\_\_\_\_


**User's Information**


Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029

Comments: 26 ms delay between decks


NO CHARGE, RESHOOT

**Shot Design**

Holes Per Row: 14 Number Of Rows: 1 Arrows for North and POI   
 Delay Time Holes in a Row: 26 ms Delay Time Between Rows: NA

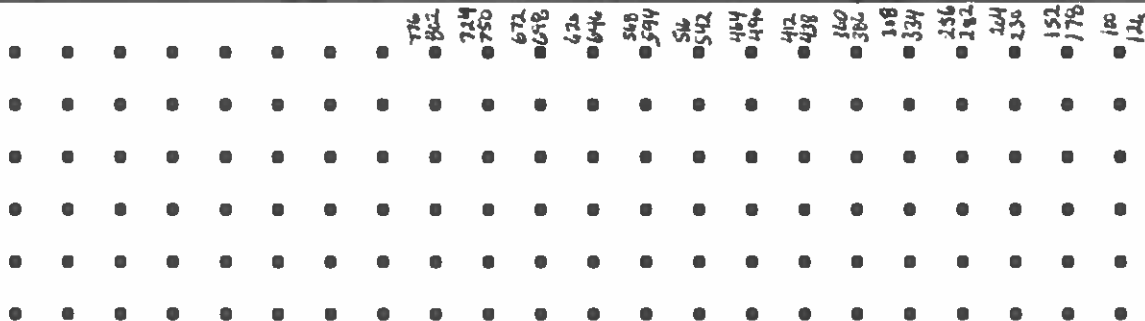

Typical Hole

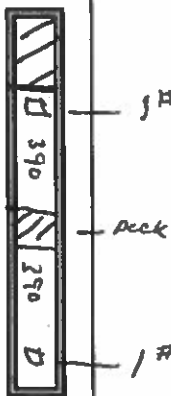

Staggered or Squared (Circle One)  
 Blast # Section 6 2017-8