

### Blast Report

C.O. Number: _____	Blast Time: <u>1:30 P.M.</u>	Blast Date: <u>6-20-17</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>18300 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.038</u>	
Location of Blast: <u>Section 6</u>	Blast GPS Points: <u>N 25°56'34.56" W 80°23'01.54"</u>	
Weather: <u>MOSTLY CLOUDY</u>	Temp: <u>88°F</u>	Wind from and Speed: <u>ESE 17 MPH</u>

**Nearest Non-Owned Structure and Seismograph Location or Other Location**

Name: <u>Compliance Machine</u>	Distance: <u>5,174.4'</u>	Direction: <u>0°</u>
GPS Points: <u>N 25°57'25.8" W 80°23'01.54"</u>		

No. of Holes	Hole Diameter	Hole Depth	No. of Powder Deck	Sub Drilling	Avg. Stem Height	Burden	Spacing	Explosives	
								Type	Pounds or Units
<u>72</u>	<u>6"</u>	<u>84'</u>	<u>144</u>	<u>NA</u>	<u>20'</u>	<u>21.5'</u>	<u>20'</u>	<u>Bulk</u>	
								<u>REDEX A</u>	<u>57,240</u>
								<u>ORANGE CAP (28MA17)</u>	<u>104</u>
								<u>ORANGE CAP (18JA17)</u>	<u>140</u>
								<b>Total Pounds</b>	<u>57,384</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: \_\_\_\_\_  
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>30m</u>	<u>72</u>	<u>AP-16</u>
<u>Electronic</u>	<u>25m</u>	<u>72</u>	<u>AP-16</u>

Delay or Type	Length	No. Used	Date Code
<u>BUS WIRE</u>	<u>840'</u>		

Cubic Yards in Shot: 97,367.976 Avg Pounds/Hole: 797 Holes/Delay: 2/1

Max LBS/Delay: 797 Powder Factor: Pounds Per Cubic Yard: 0.595

Scaled Distance Factor: 183.287 Type of Blasting Machine: Twist Battery

Blaster Name: John Rohrer Blaster Signature: [Signature]

Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: 6715-000005

Site Inspection Performed: Yes No \_\_\_\_\_ Mine Management Signature: [Signature]

**User's Information**

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029



**Comments:**

\_\_\_\_\_

**Shot Design**


Holes Per Row: 24 Number Of Rows: 3 Arrows for North and POI [Circle] Typical Hole

Delay Time Holes in a Row: See Timing Diagram Delay Time Between Rows: See Timing Diagram

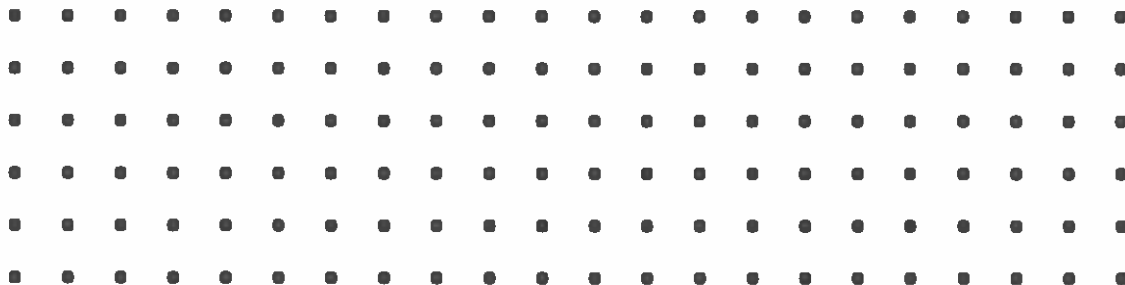

Staggered or Squared (Circle One)  
 Blast # Section 6 2017-10

Complete layout

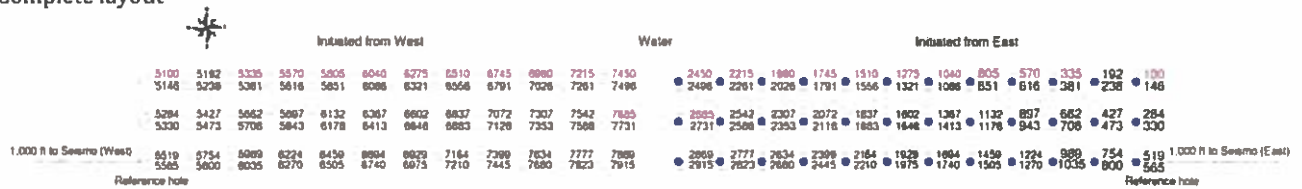

Water

