

Blast Report

C.O. Number: _____	Blast Time: <u>1:06 P.M.</u>	Blast Date: <u>8-16-17</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>18300 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.082</u>	
Location of Blast: <u>Section 4-5</u>	Blast GPS Points: <u>N 25° 56' 59.91" W 80° 22' 00.87"</u>	
Weather: <u>MOSTLY CLOUDY</u>	Temp: <u>92°F</u>	Wind from and Speed: <u>ESE 5 MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>COMPLIANCE MACHINE</u>	Distance: <u>2,692.8'</u>	Direction: <u>0°</u>
GPS Points: <u>N 25° 57' 26.30" W 80° 22' 00.87"</u>		

No. of Holes	Explosives		
Hole Diameter	Type		Pounds or Units
<u>90</u>			
<u>4.5"</u>			
<u>84'</u>	Bulk		
<u>90</u>	Bulk	<u>REMEX A</u>	<u>49,950</u>
<u>NA</u>	Boosters	<u>ORANGE CAP (20MA17)</u>	<u>180</u>
<u>16'</u>	Boosters		
<u>17'</u>			
<u>18'</u>			
		Total Pounds	<u>50,130</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: \_\_\_\_\_  
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>30m</u>	<u>38</u>	<u>AP16</u>
<u>Electronic</u>	<u>30m</u>	<u>52</u>	<u>NO16</u>
<u>Electronic</u>	<u>15m</u>	<u>61</u>	<u>MY17</u>
<u>Electronic</u>	<u>15m</u>	<u>29</u>	<u>OC16</u>

Delay or Type	Length	No. Used	Date Code
<u>PLUS WIRE</u>	<u>810'</u>		

Cubic Yards in Shot: 85,680 Avg Pounds/Hole: 557 Holes/Delay: 111  
 Max LBS/Delay: 557 Powder Factor: Pounds Per Cubic Yard: 0.581  
 Scaled Distance Factor: 114.098 Type of Blasting Machine: Twist Battery

Blaster Name: John Rohrer Blaster Signature: [Signature]  
 Blaster Address: 9358 NW 47th St. Sunrise, FL 33351 Blaster No: EP15-00005  
 Site Inspection Performed: Yes No Mine Management Signature: [Signature]


User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St Pembroke Pines, FL 33029

Comments: 9358 NW 47th St. Sunrise, FL 33351

Shot Design

Holes Per Row: 18 Number Of Rows: 5 Arrows for North and POI: [Arrow] Typical Hole  
 Delay Time Holes in a Row: 24 ms Delay Time Between Rows: 176 ms

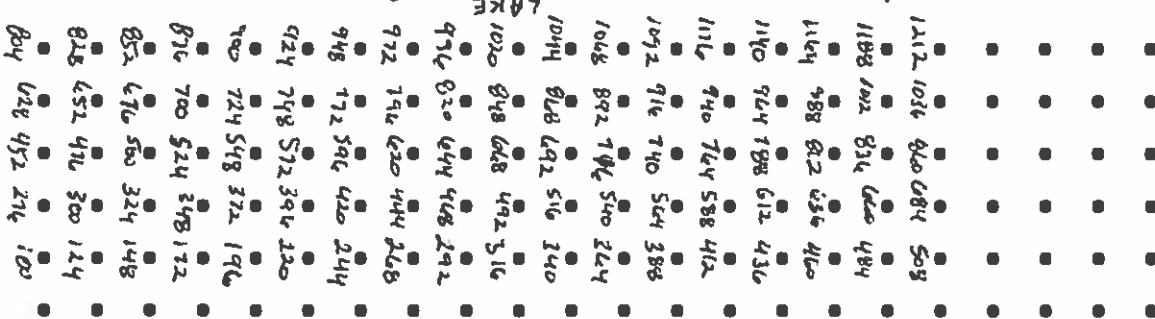

Staggered or Squared (Circle One)  
 Blast # Section 4-5 (2017-8)