

Blast Report

C.O. Number: <u> </u>	Blast Time: <u>1:29 P.M</u>	Blast Date: <u>12-1-16</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>18300 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.0299 JR</u>	
Location of Blast: <u>Section C</u>	Blast GPS Points: <u>N26°56'35.5"W 81°23'6"</u>	
Weather: <u>Cloudy</u>	Temp: <u>84°F</u>	Wind from and Speed: <u>5 11 MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>Sunset Falls Compliance</u>	Distance: <u>5,121.6'</u>	Direction: <u>0°</u>
GPS Points: <u>N25°57'25.79"W 80°23'6"</u>		

No. of Holes	Hole Diameter	Hole Depth	No. of Powder Deck	Sub Drilling	Avg. Stem Height	Burden	Spacing	Explosives Type	Pounds or Units
<u>138</u>	<u>4.5"</u>	<u>84'</u>	<u>138</u>	<u>NA</u>	<u>16'</u>	<u>16.6'</u>	<u>18'</u>	<u>RIOMEX A</u>	<u>78,798</u>
								<u>BOOSTERS</u>	
								<u>ORANGE CAP (314Y15E3)</u>	<u>72</u>
								<u>ORANGE CAP (282Y15E5)</u>	<u>8</u>
								<u>BLACK CAP (145F16E2)</u>	<u>196 units / 147 #</u>
								Total Pounds	<u>79,025</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>35m</u>	<u>66</u>	<u>ALU-15</u>
<u>Electronic</u>	<u>25m</u>	<u>72</u>	<u>JY-15</u>
<u>Electronic</u>	<u>40m</u>	<u>138</u>	<u>FE-16</u>

Delay or Type	Length	No. Used	Date Code
<u>BW WIRE</u>	<u>1,068'</u>		


Cubic Yards in Shot: 128,340 Avg Pounds/Hole: 573 Holes/Delay: 1
 Max LBS/Delay: 573 Powder Factor: Pounds Per Cubic Yard: 0.61
 Scaled Distance Factor: 213.96 Type of Blasting Machine: Twist Battery
 Blaster Name: John Rohrer Blaster Signature: [Signature]
 Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: EP15-000005
 Site Inspection Performed: (Yes) No Mine Management Signature: [Signature]

User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029

Comments: _____

Shot Design
 Holes Per Row: 23 Number Of Rows: 6 Arrows for North and POI (↑) Typical Hole
 Delay Time Holes in a Row: 26 ms Delay Time Between Rows: 68 ms

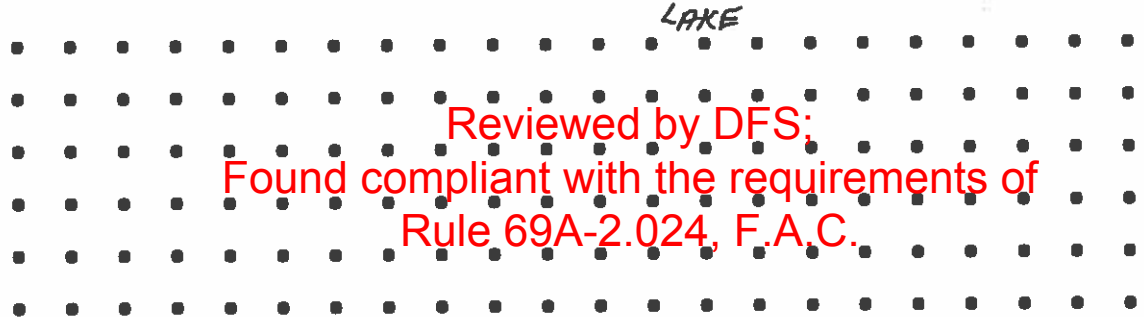

**Reviewed by DFS:
 Found compliant with the requirements of
 Rule 69A-2.024, F.A.C.**

Staggered or (Squared) (Circle One)
 Blast # 003-2016

1012	944	876	808	740	672
986	918	850	782	714	646
960	892	824	756	688	620
934	866	798	730	662	594
908	840	772	704	636	568
882	814	746	678	610	542
856	788	720	652	584	516
830	762	694	626	558	490
804	736	668	600	532	464
778	710	642	574	506	438
752	684	616	548	480	412
726	658	590	522	454	386
700	632	564	496	428	360
674	606	538	470	402	334
648	580	512	444	376	308
622	554	486	418	350	282
596	528	460	392	324	256
570	502	434	366	298	230
544	476	408	340	272	204
518	450	382	314	246	178
492	424	356	288	220	152
466	398	330	262	194	126
440	372	304	236	168	100

L
a
k
e



← POI

Reviewed by DFS;
 Found compliant with the requirements of
 Rule 69A-2.024, F.A.C.